



Disassembling Ridgid R86034 Housing

Prerequisite Only

Written By: Nathan Hoyt



INTRODUCTION

Removing the housing to get to the components beneath.



TOOLS:

- [T10 Torx Screwdriver](#) (1)
 - [T15 Torx Screwdriver](#) (1)
 - [Metal Spudger](#) (1)
-

Step 1 — Housing



- Peel the black rubber cover off of the casing using the flat metal spudger. The rubber cover is securely attached to the housing so some force is necessary.
- ☑ When putting the rubber cover back the driver remember that its orientation is important. Rotate the casing until it fits onto the housing with no gaps between it and the clear cover.

Step 2



- Remove plastic cover with your hands. The plastic cover should be much easier to remove than the rubber cover. There is no need to force it off.

Step 3



- Unscrew the four 16 mm long screws from back panel with a T10 Torx Screwdriver.
- Use a firm grip to peel the the back panel off. It is sealed tight and requires a good amount of force to remove.


Step 4




- Unscrew the eight 15 mm T10 Torx screws from the housing
- ⓘ The screw hole located nearest the battery port is deep and small. Most screwdrivers with replaceable bits will **not** fit into the hole. Instead use a conventional screwdriver that fits.

Step 5





 Place the driver flat on a table before completely separating the two halves of the housing so components don't fall out during opening.

- Pry apart the two halves of the housing at the back side of the driver using the metal spudger .

 The housing is easier to remove if you pry from multiple sides.

Step 6

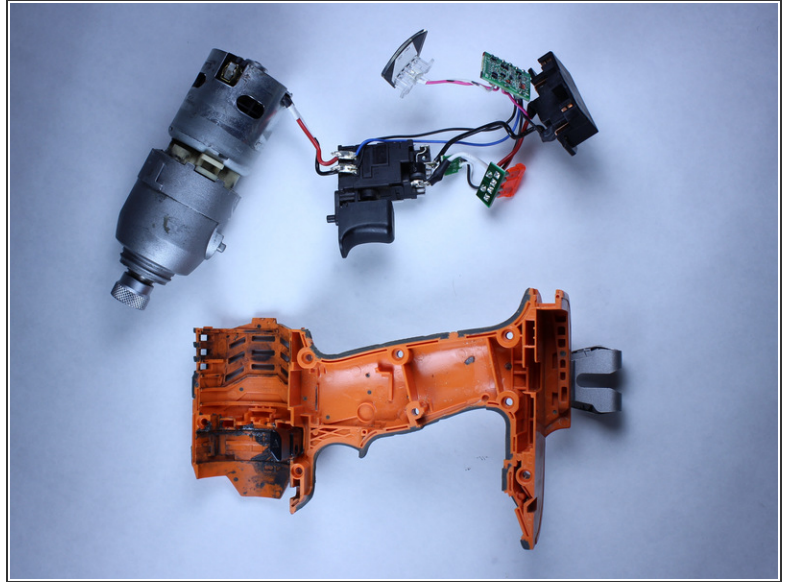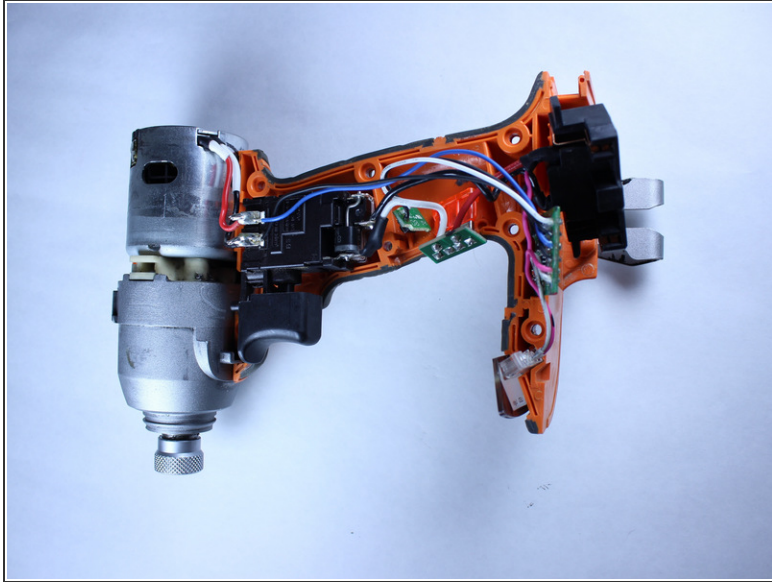

Do not remove the direction switch. It isn't necessary.

- Pull out **all** electrical components from housing by hand. First, lift out the motor. Next, follow the wires, lifting out components until all components are outside of the housing.
- ⓘ With two exceptions all of the components should come out of their respective slots with ease and require little force to lift out. The circuit board located nearest the battery pack and the LED light will be hard to pull out.
- ✦ When reassembling remember to precisely place all components in their correct slots with their correct orientations.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-10-13 11:47:01 PM.